


asa



**HUOLTO-OHJE
SERVICEANVISNING
3374**


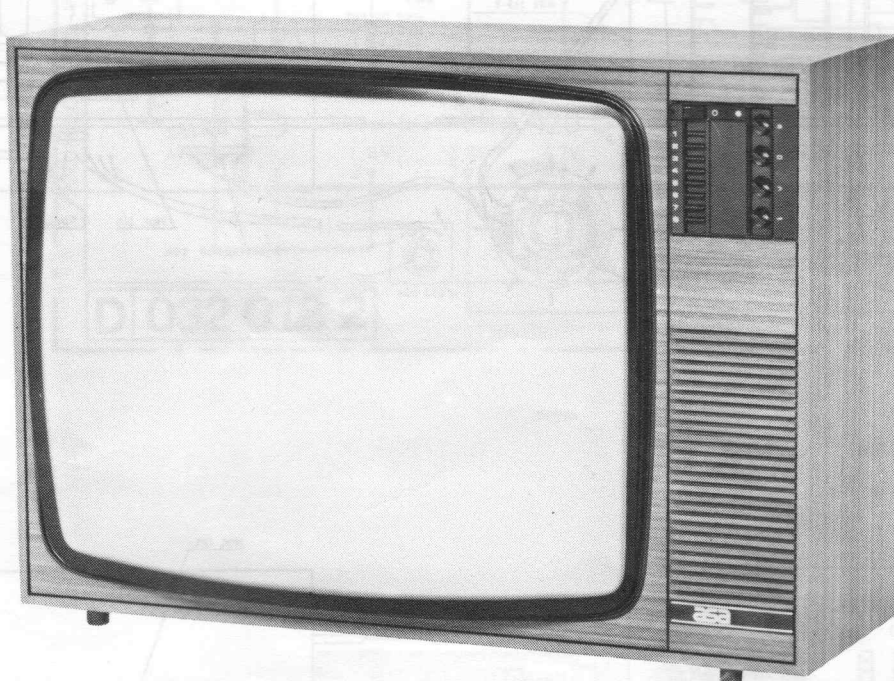





OY LOHJA AB ELECTRONICS


Box 13
SF 20311 Turku 31
FINLAND
Tel. 921-392244
Telex 62-364 asa sf



KERTASÄÄDÖT ENGÄNGSINSTÄLLNINGAR

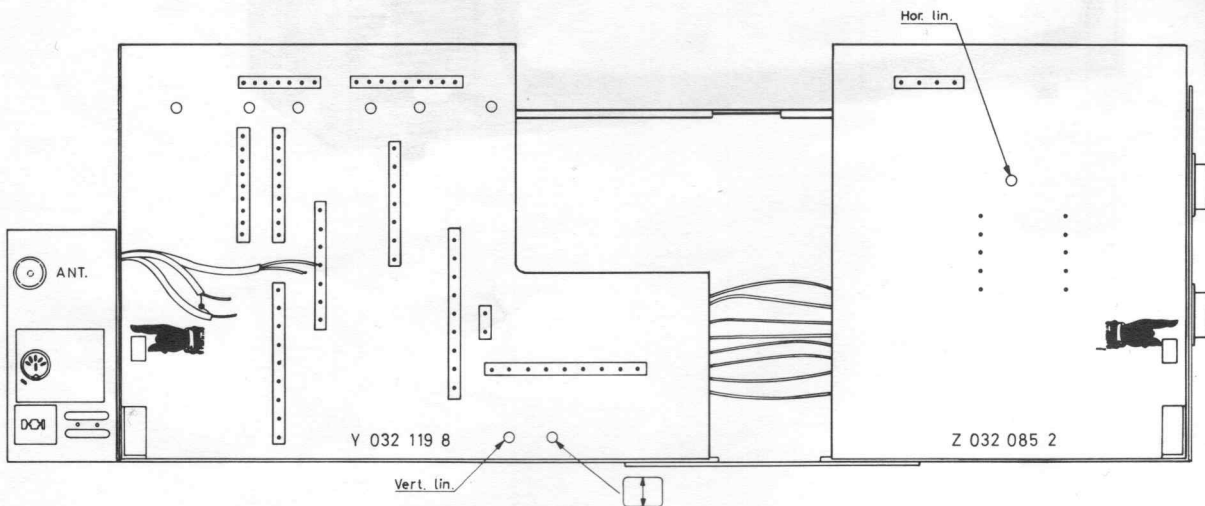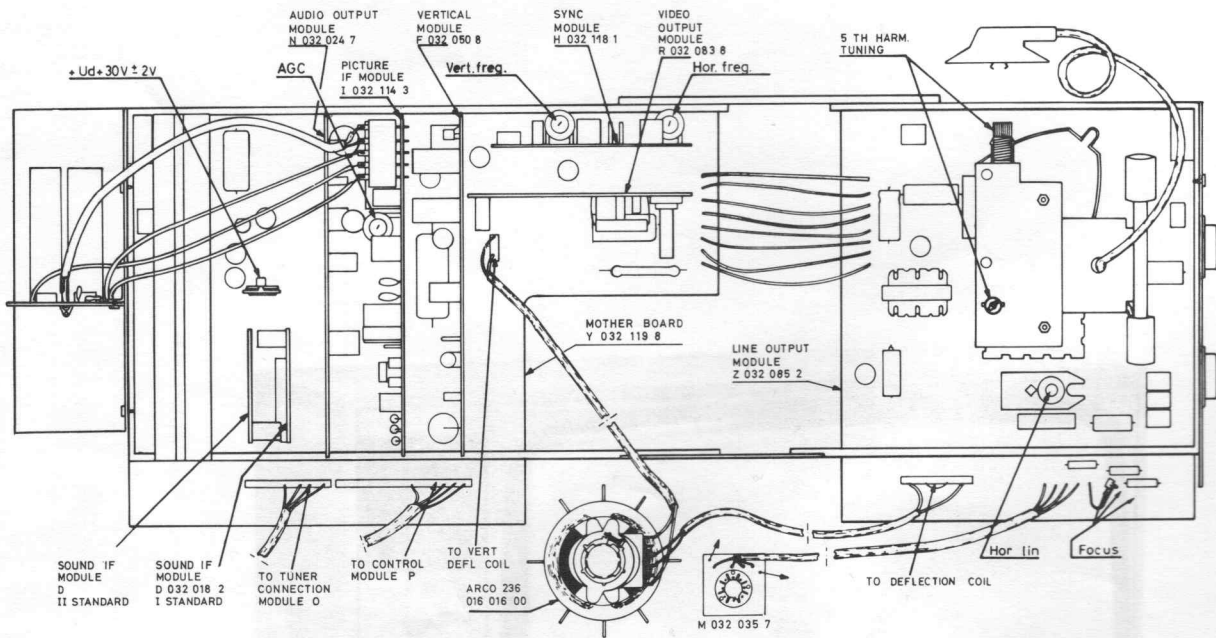

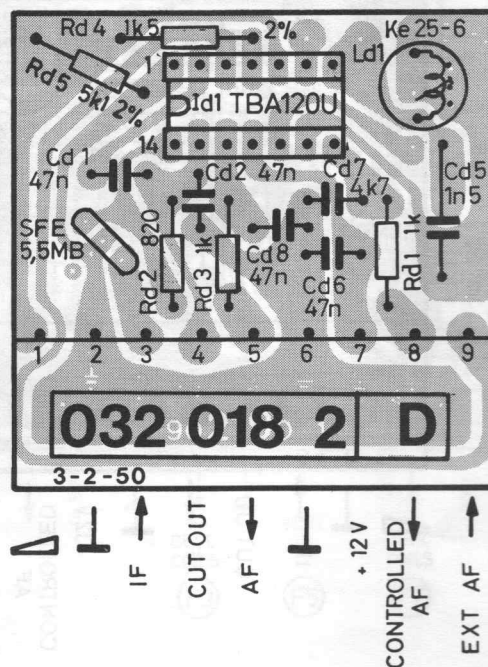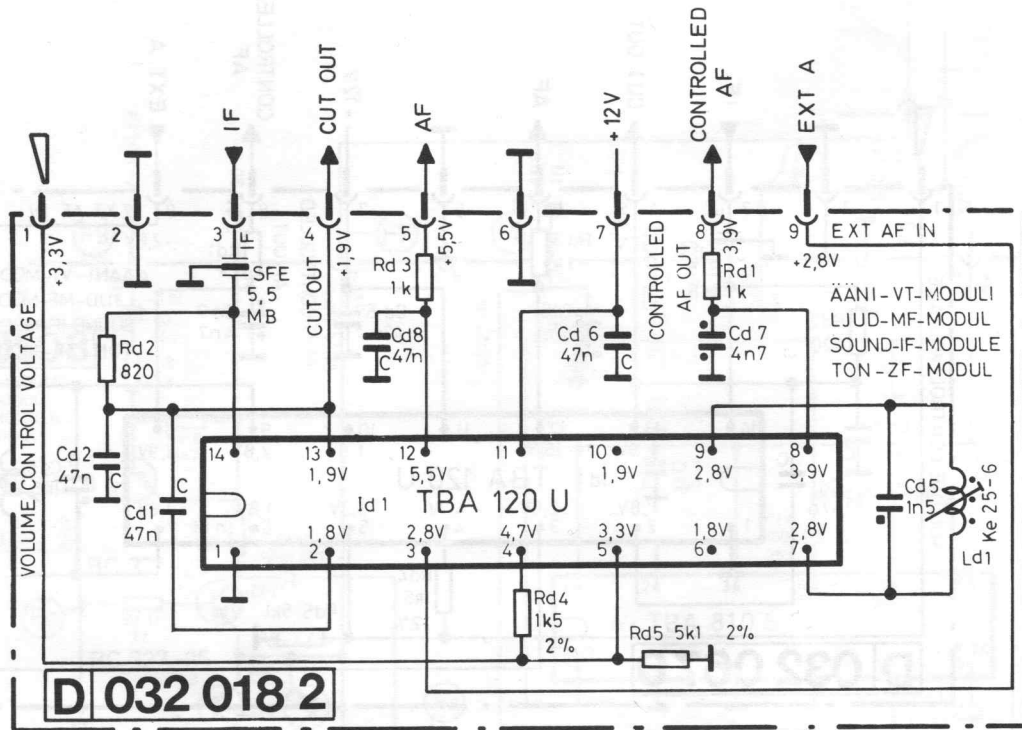


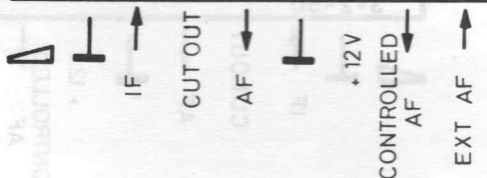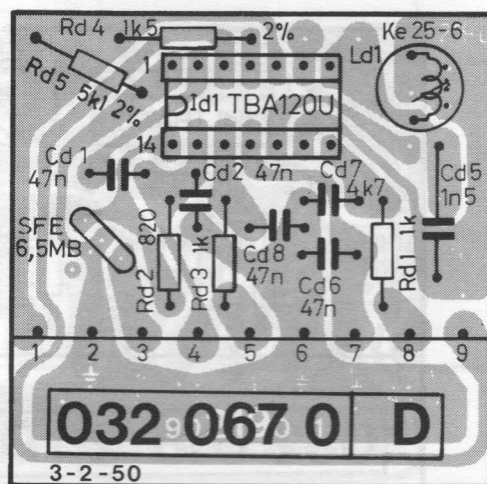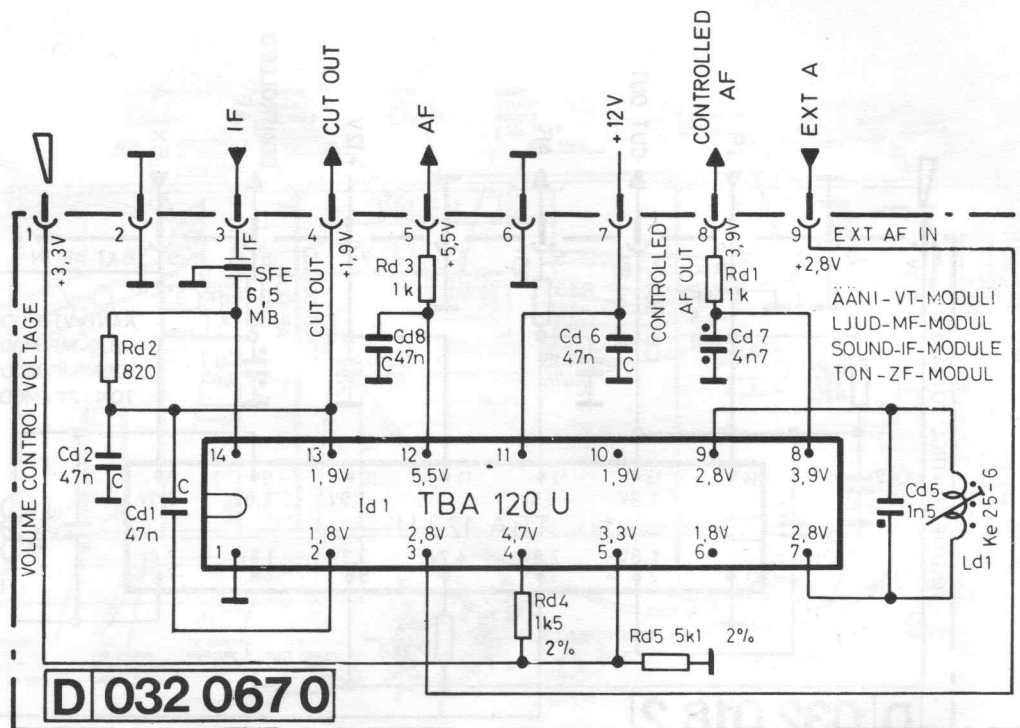D**SOUND-IF-MODULE (OIRT)****032 067 0**

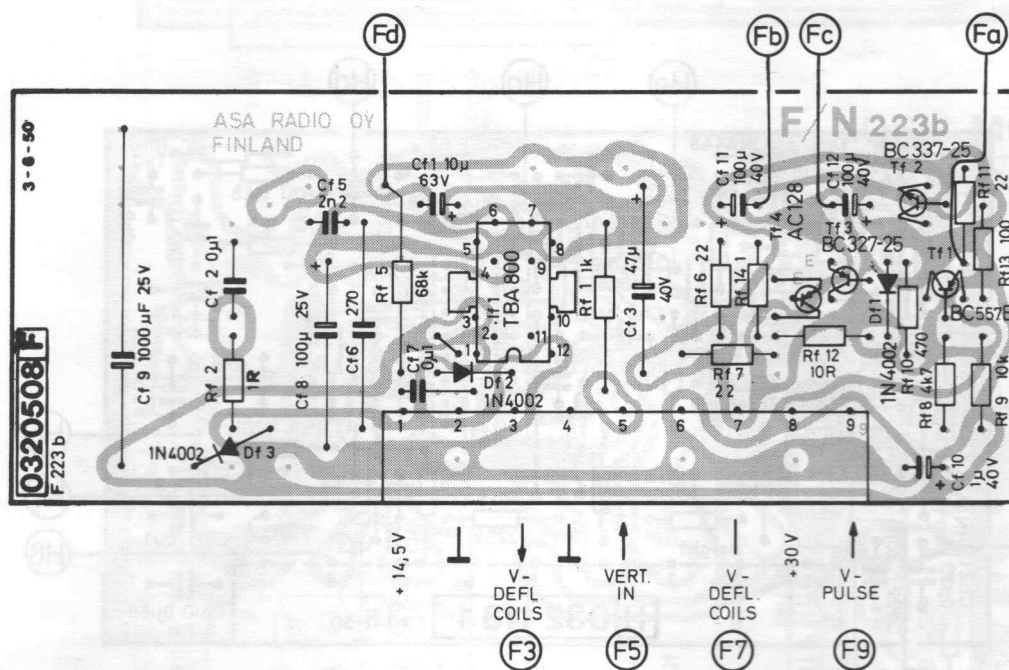


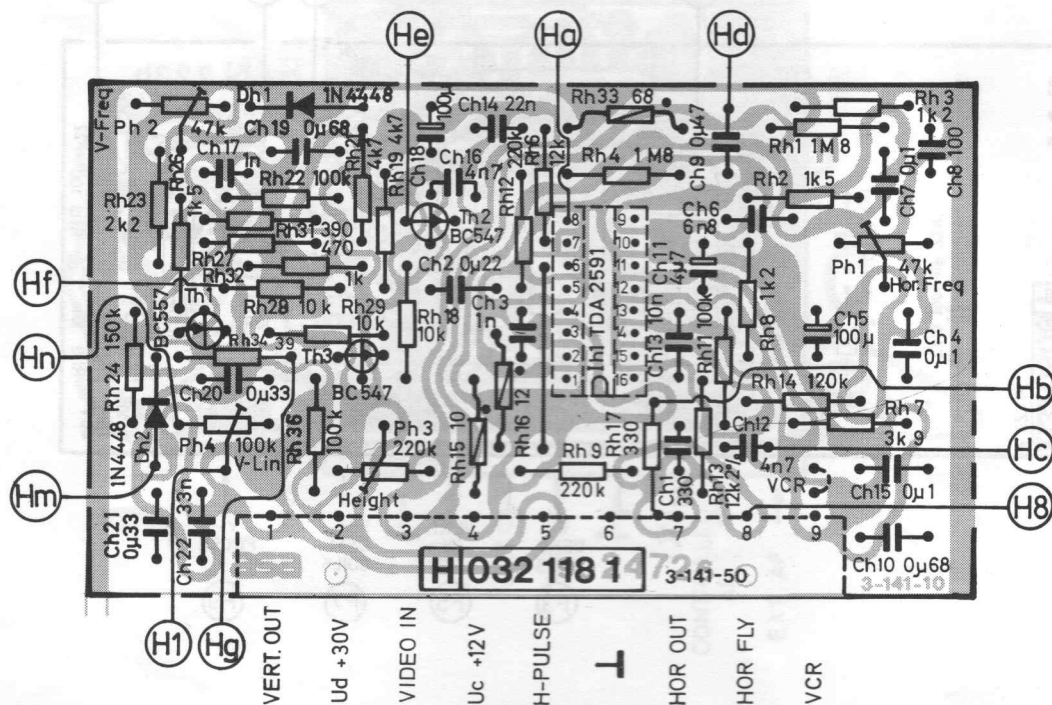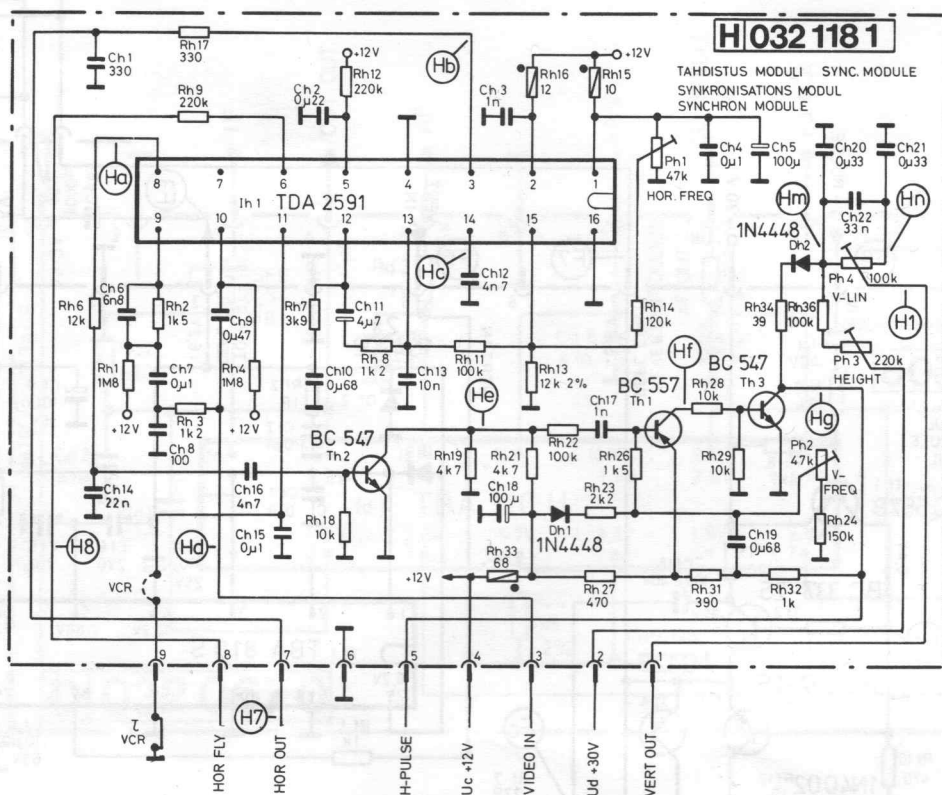

032 114 3


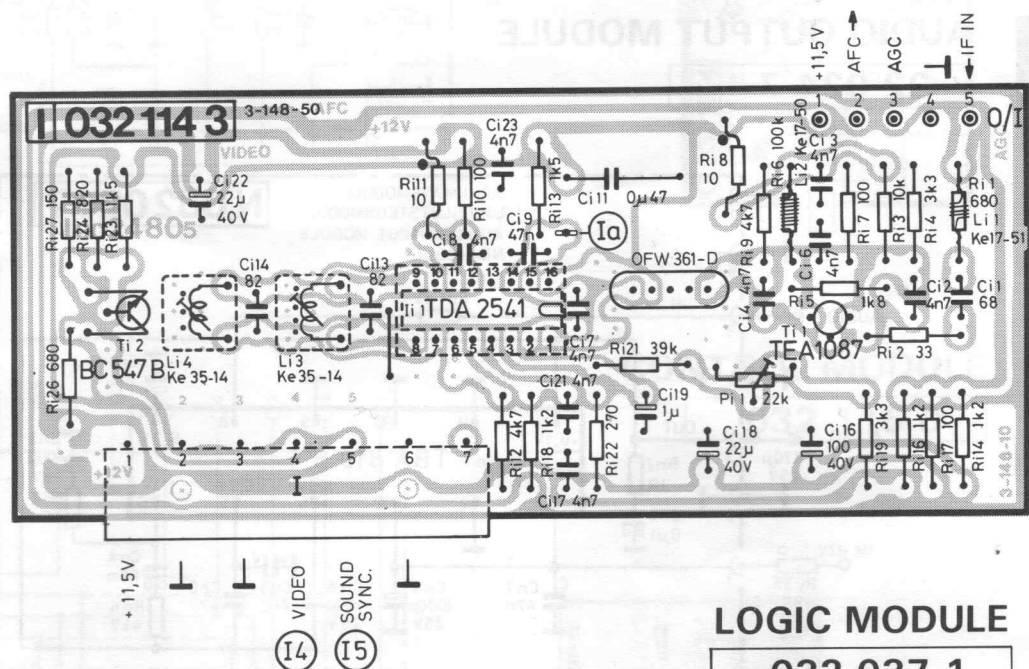


032 037 1

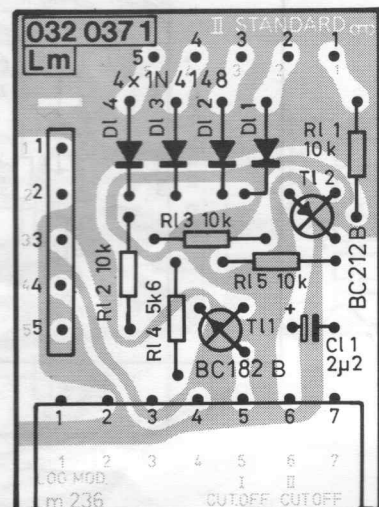



M PICT. TUBE SOCKET MODULE

032 035 7

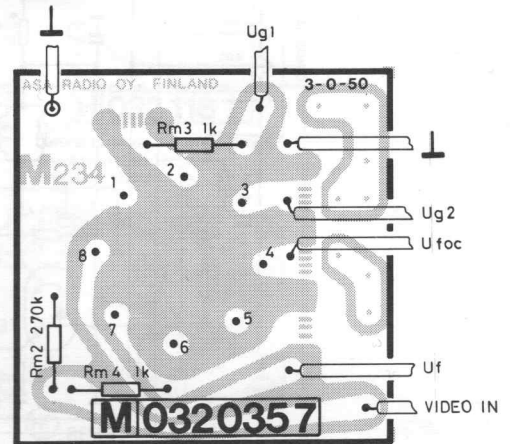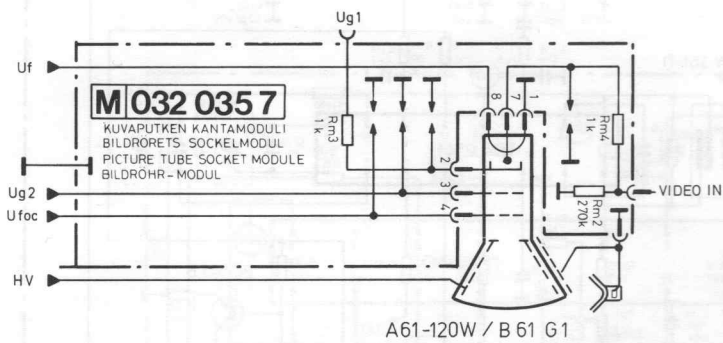

N AUDIO OUTPUT MODULE



32 024 7

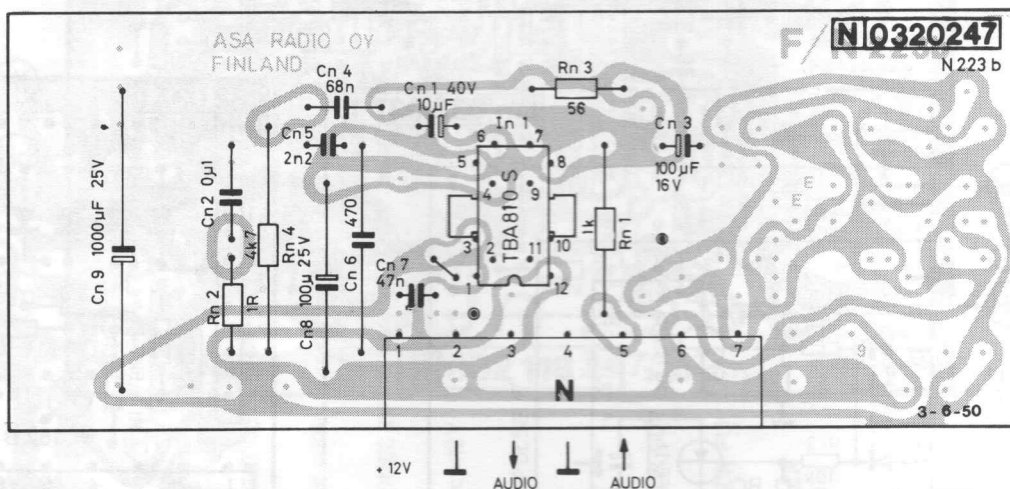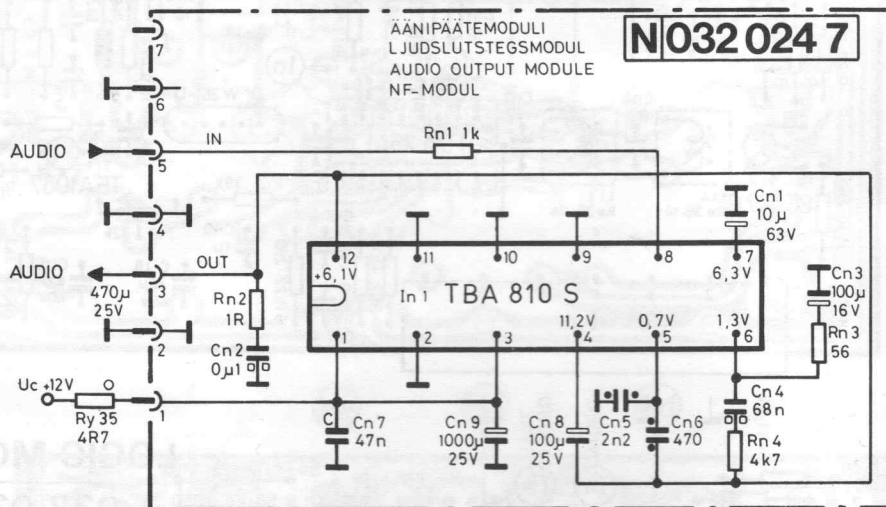

TUNER CONNECTION MODULE

032 117 4



O

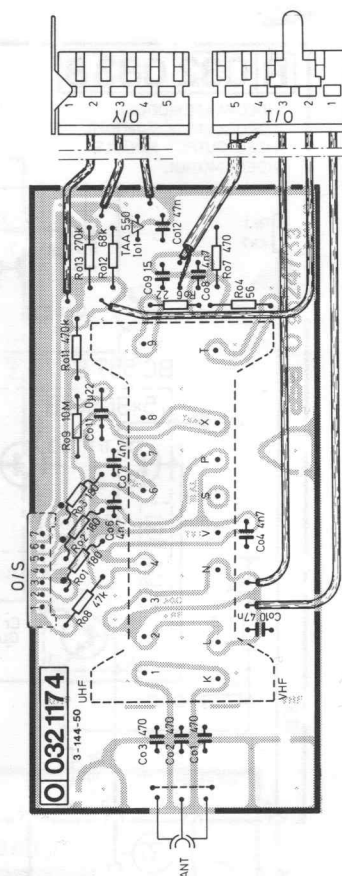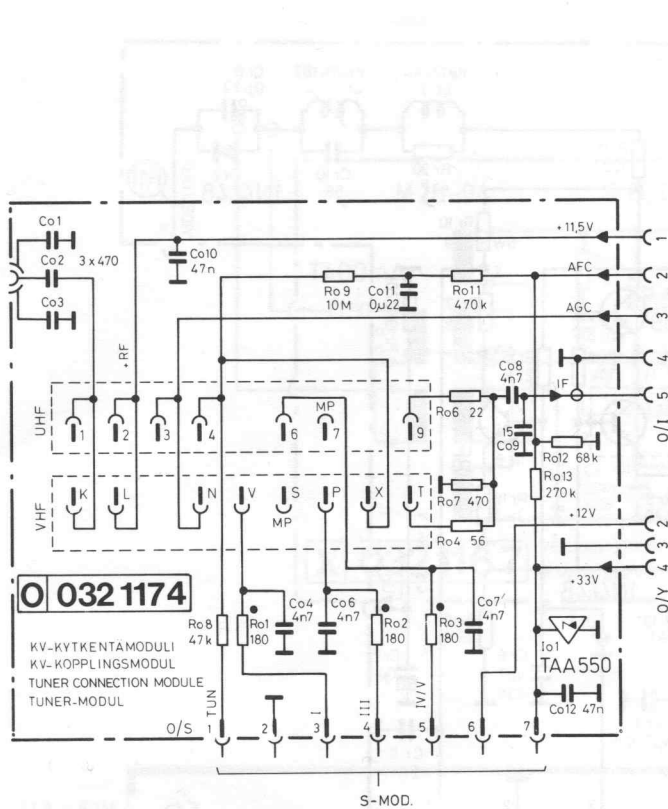

CONTROL MODULE

032 115 0

P

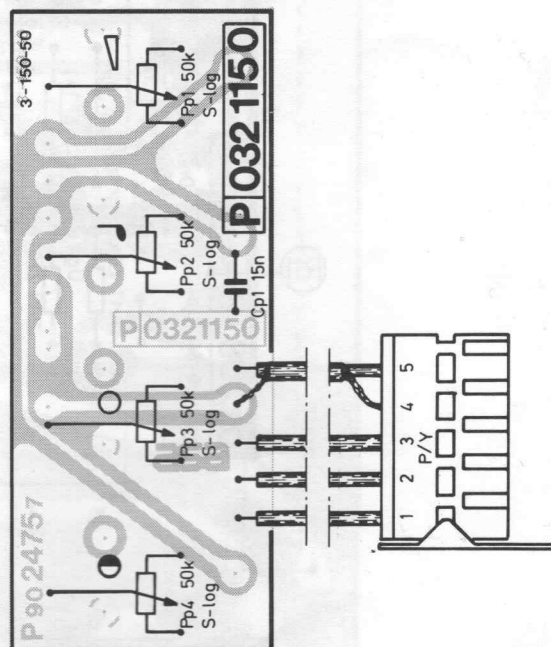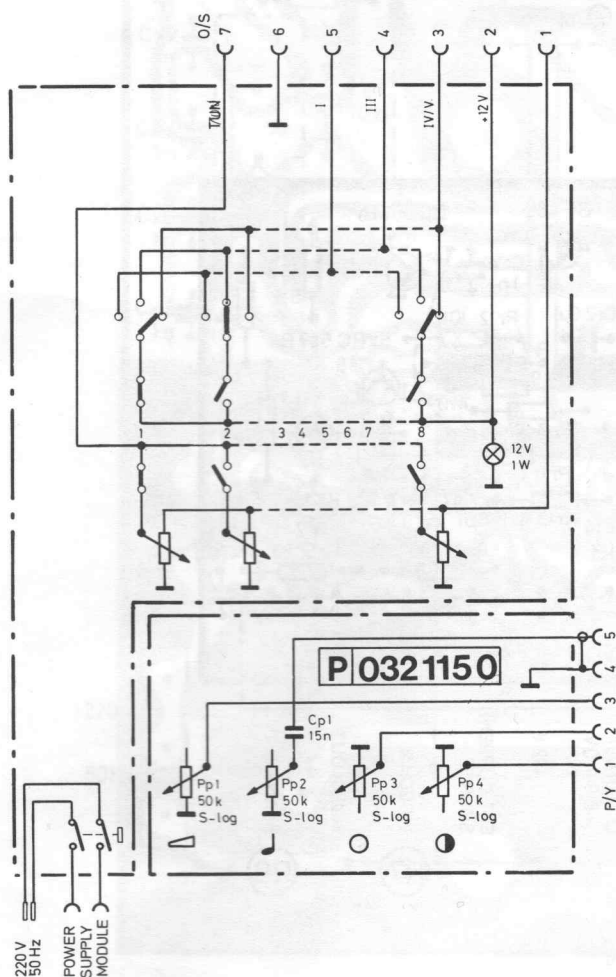



R



VIDEO OUTPUT MODULE


032 083 8



R 032 0838

VIDEO PÄÄTEMODULI
VIDEOSLUTSTEGSMODUL
VIDEO OUTPUT MODULE
VIDEO-MODUL

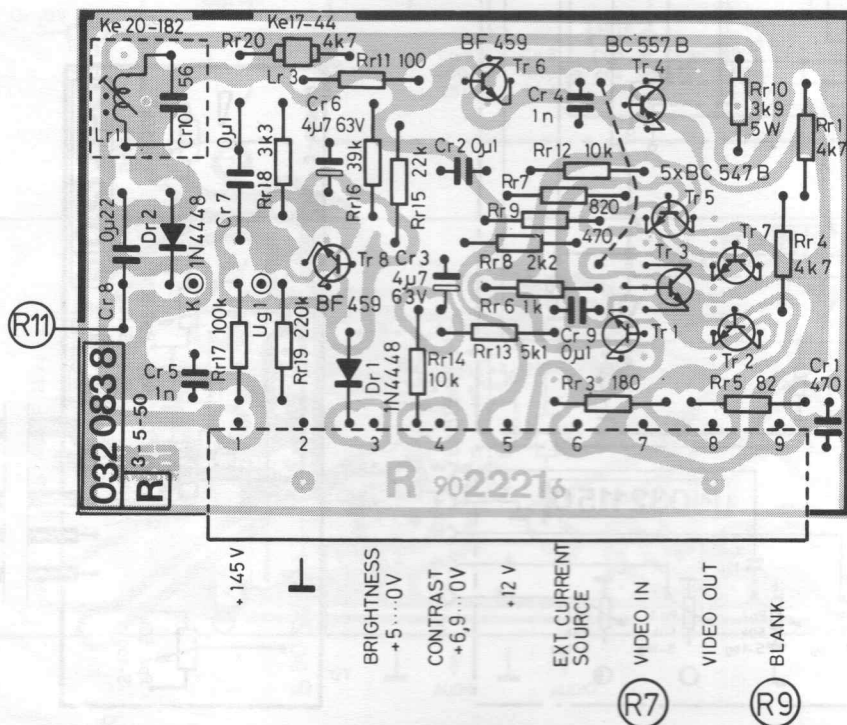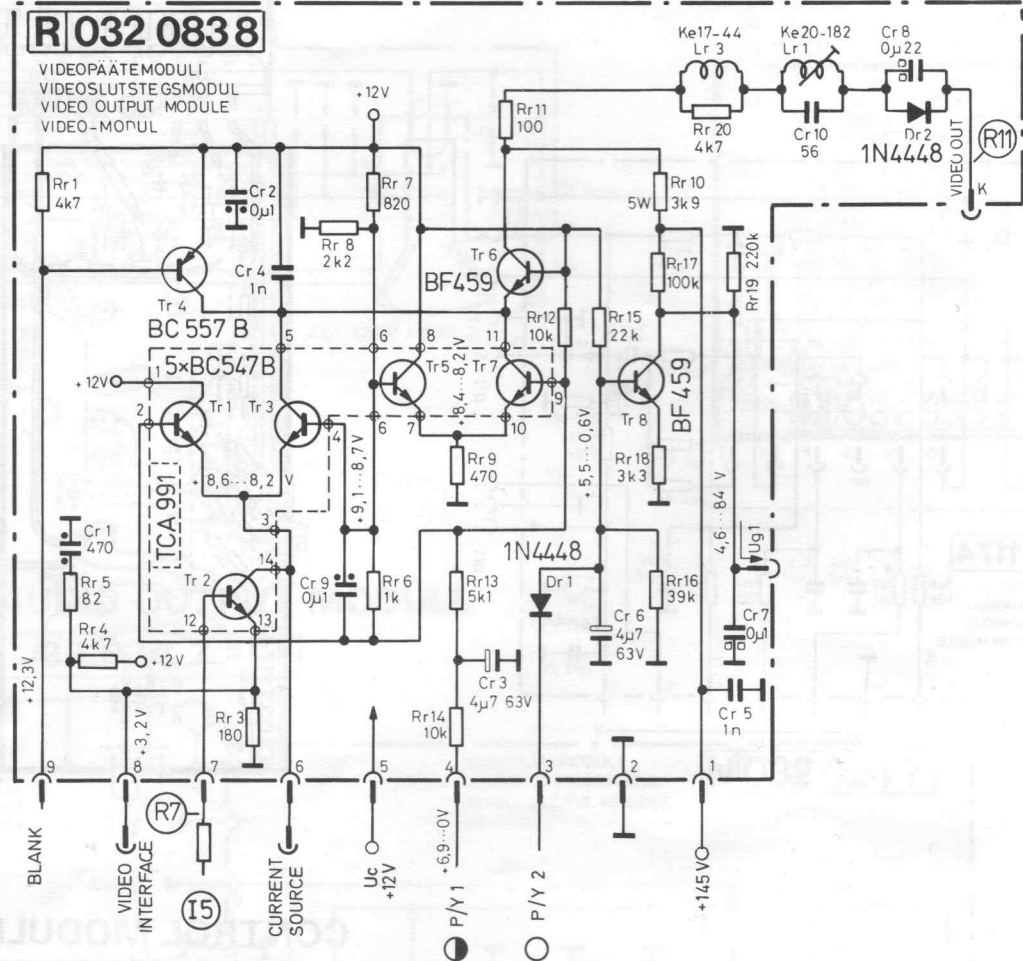


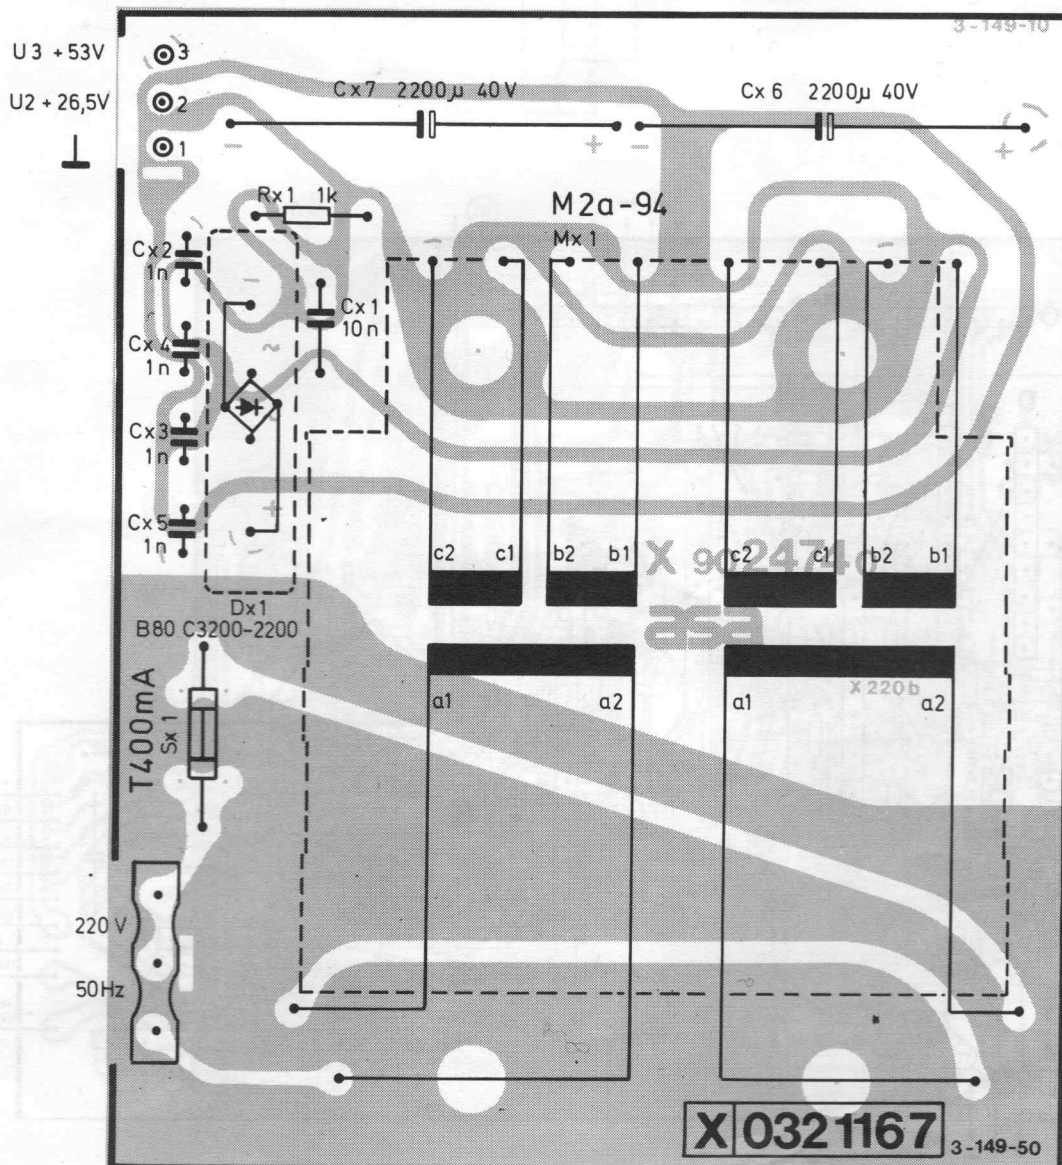
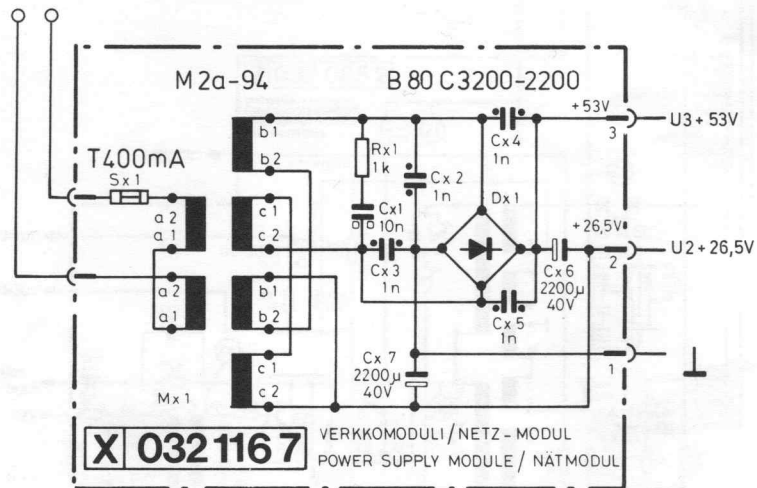


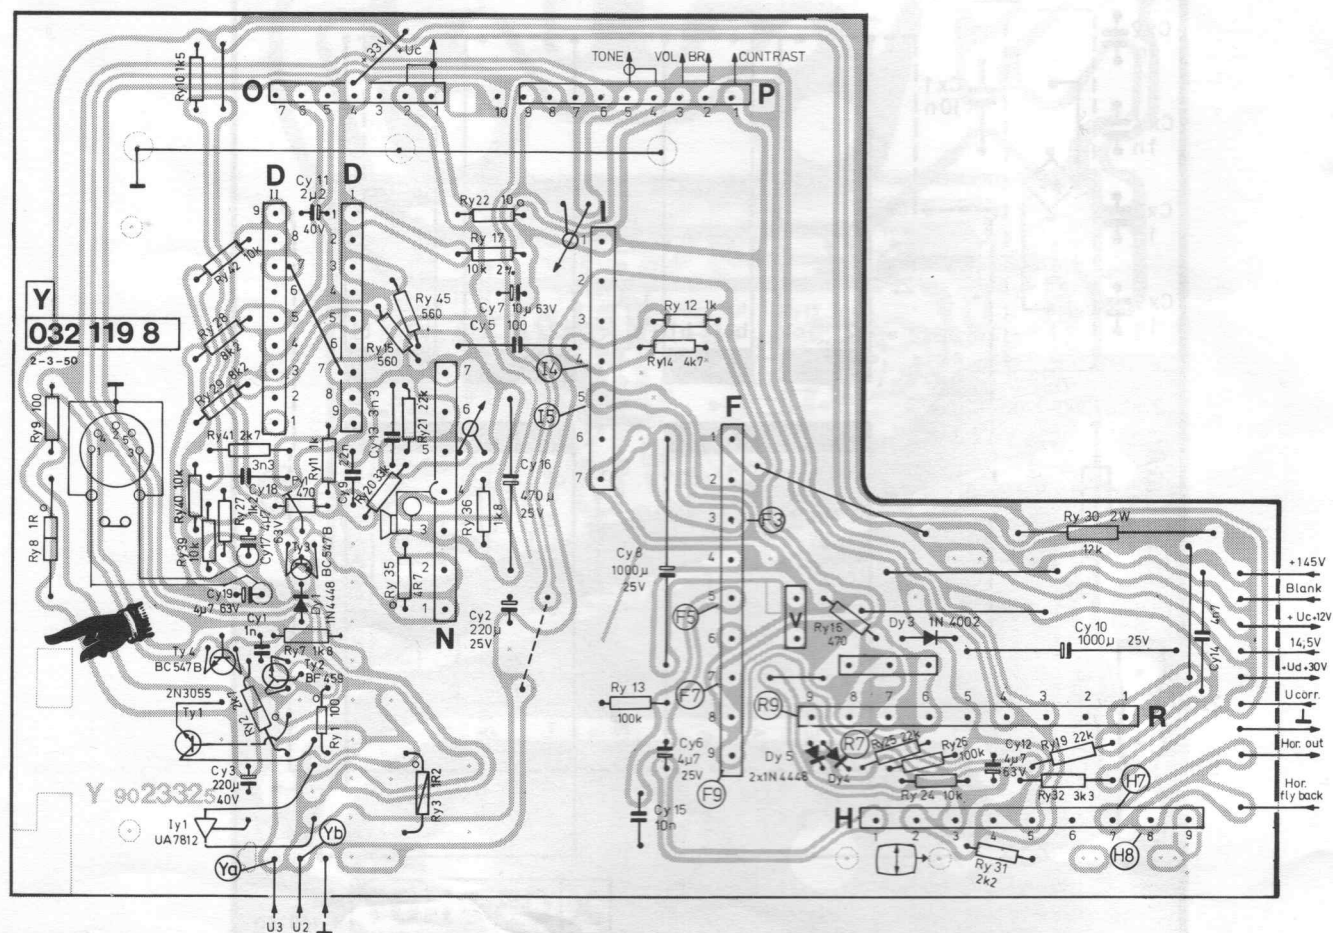

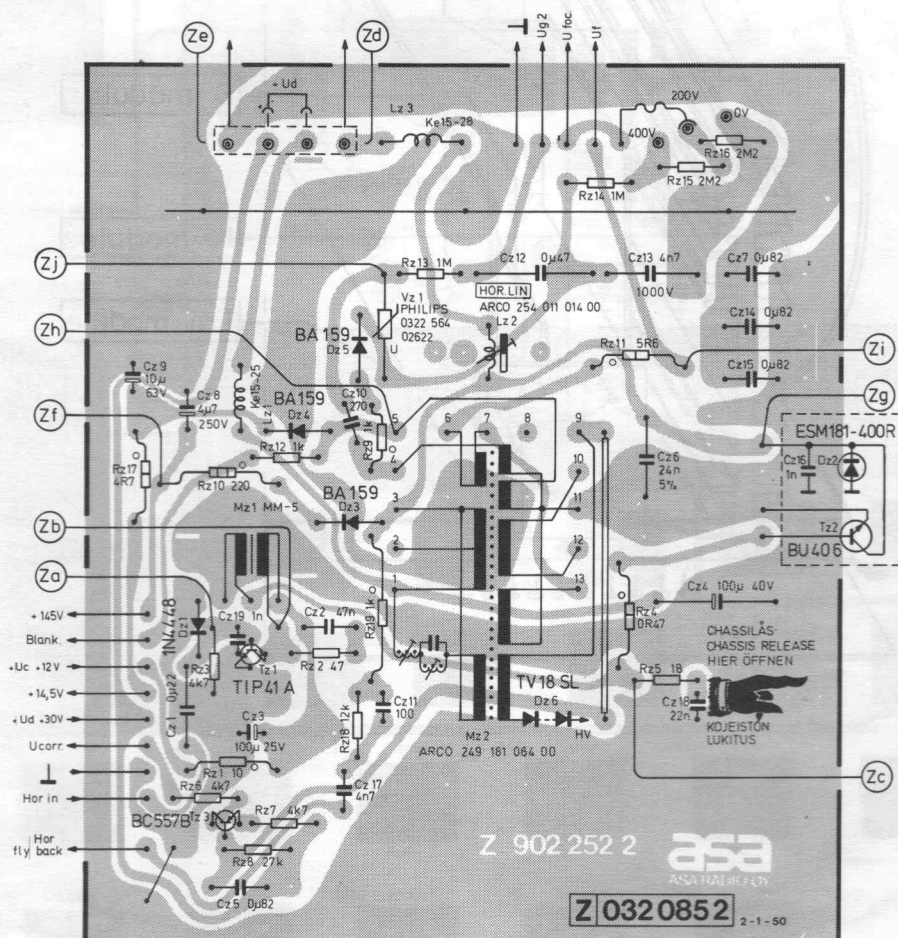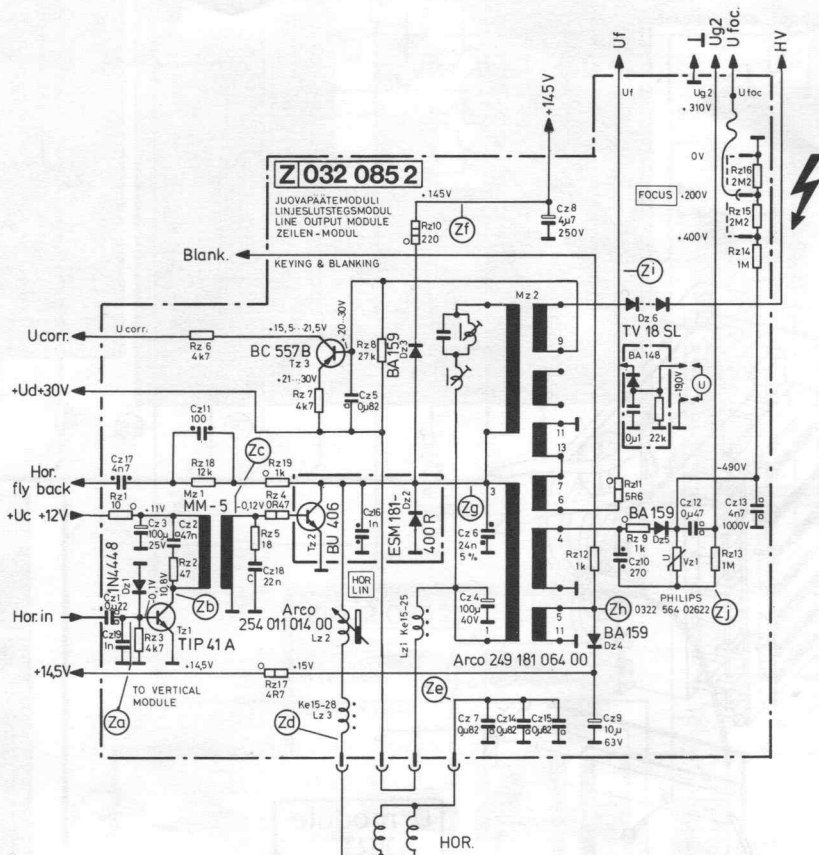

OIRT-ÄÄNI-VT-MODULIN ASENNUS MONTERING AV OIRT-LJUD-MF-MODUL

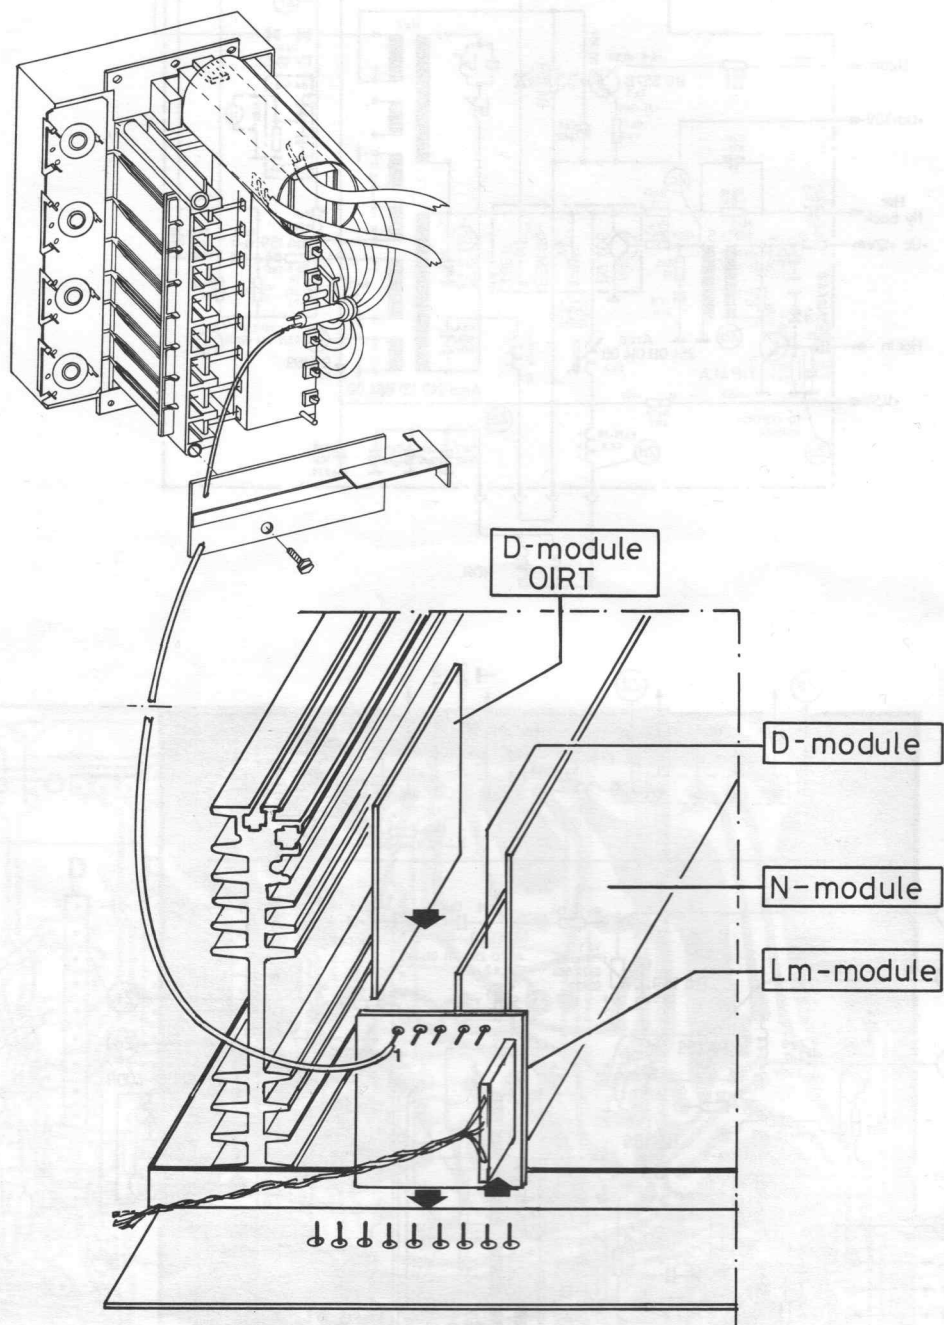

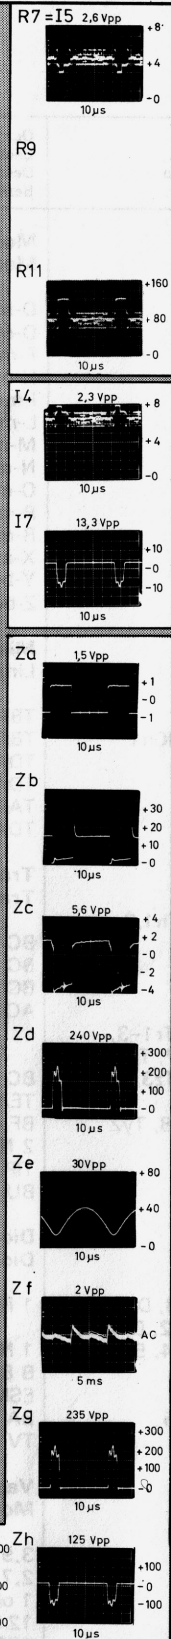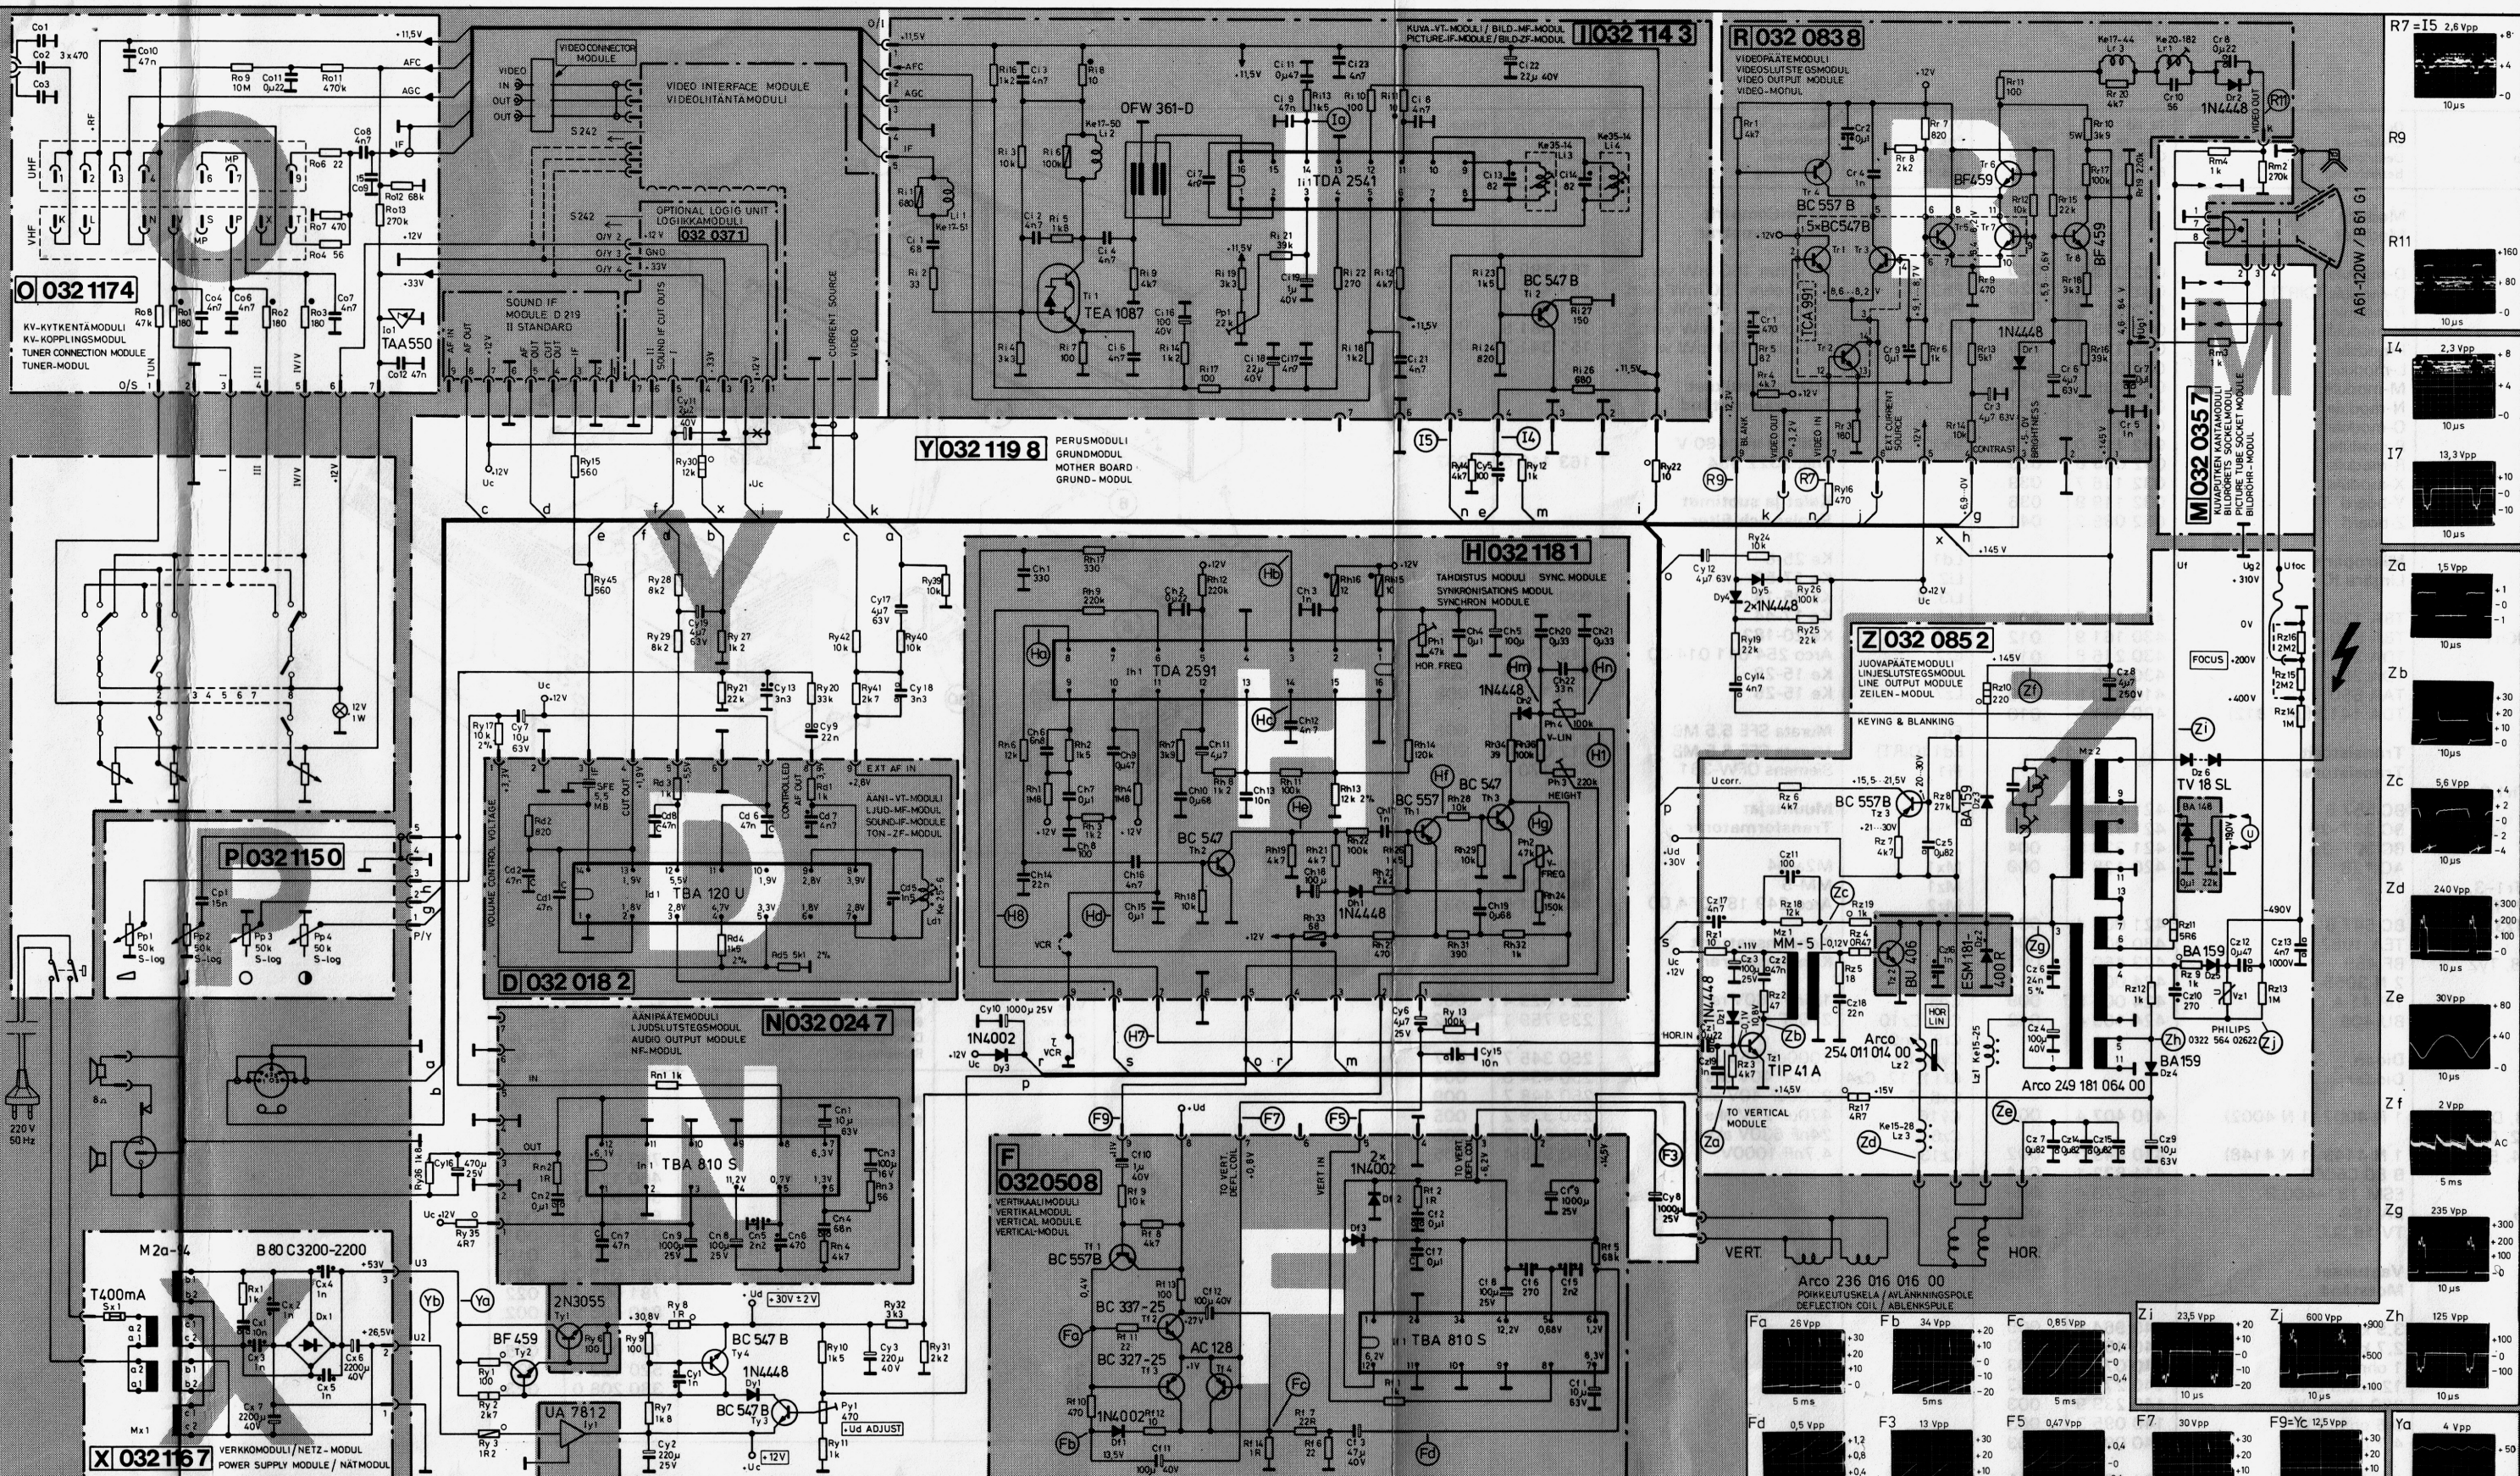


1/10-1/3W	Keräminen	Polystyren	Polyester	Polypropyl.	Merkintöjä voidaan tarpeen vailla yhdistää. Notes can be combined when necessary.
1/2W	Ceramic	Polycarbon.			
1W	63-100V	63-100V	100V	100V	Paper capac. HI - Cap.
2W	160-250V	160-250V	250V	250V	Electrol. 16V 1500V
3W	400-500V	400V	400V	400V	Bipol. capac. Foil capac.
7W					Tantal capac. Y capacitors
Palamaton Flame proof					

ESM 181-400R	BU 406	UA 7812	BF 459
TAA 550	AC 128	BC 327-25	BC 327-25
SN 76550	BC 140-16	2N 3055	AY 102
	BF 178	BU 102	

OIKEUDET MUUTOKSIIN PIDÄTÄTÄÄN.
RÄTT TILL ÄNDRINGAR FÖRBÄLLER.
SUBJECT TO CHANGES WITHOUT NOTICE.
ÄNDERUNGEN VORBEHALTEN.

asa 3374

Viite Pos. nr. Part No Pos. Nr.	Osa/arvo Benämning Description Bezeichnung	Til. no Best. nr. Order No Best. Nr.	Hintar. Prisgr. Price Gr. Preisgr.	Viite Pos. nr. Part No Pos. Nr.	Osa/arvo Benämning Description Bezeichnung	Til. no Best. nr. Order No Best. Nr.	Hintar. Prisg. Price Gr. Preisgr.
	Modulit Moduler				Potentiometrit Potentiometrar		
	D-module	032 018 2	020	Ph1, 2	47 kohm 150 mW vert.	151 389 5	006
	D-module (OIRT)	032 067 0	020	Ph3	220 kohm 150 mW vert.	151 405 2	006
	F-module	032 050 8	026	Ph4	100 kohm 150 mW vert.	151 397 4	006
	H-module	032 118 1	030	Pi1	22 kohm 150 mW vert.	151 381 9	006
	I-module	032 114 3	036	Py1	470 ohm 150 mW vert.	151 341 7	006
	L-module	032 037 1	020				
	M-module	032 035 7	011		Erikoisvastukset Olinjäramotstånd		
	N-module	032 024 7	021				
	O-module	032 117 4	045				
	P-module	032 115 0	012	Vz1	VDR 10 mA 680 V Phil. 2322 564	163 110 0	007
	R-module	032 083 8	023				
	X-module	032 116 7	039		Kelat ja suotimet Spolar och filter		
	Y-board	032 119 8	036				
	Z-board	032 085 2	041				
	Mikropiirit Linjära IC						
ICd1	TBA 120 U	430 121 7	009	Ld1	Ke 25-6	930 052 9	008
ICf1, ICn1	TBA 810 S	430 161 9	012	Li2	Ke 17-50	930 161 4	008
ICb1	TDA 2591	430 216 8	017	Li3, 4	Ke 35-14	930 137 7	008
ICi1	TDA 2541	430 213 7	016	Lr1	Ke 17-44	930 011 0	008
ICo1	TAA 550	410 330 5	009	Lr2	Ke 20-182	930 045 7	008
ICy1	TDA 1412 (uA 7812)	430 011 5	010	Lz2	Arco 254 011 014 00	340 235 1	010
				Lz3	Ke 15-28	930 101 6	008
				Lz7	Ke 15-25	930 100 9	008
	Transistorit Transistorer			Fd1	Murata SFE 5,5 MB	312 012 1	006
				Fd1 (OIRT)	Murata SFE 6,5 MB	312 031 0	006
				Fi1	Siemens OFW-361	312 170 4	014
					Muuntajat Transformatorer		
Tf1, Th1,3, Tr4	BC 557 B	421 004 7	003				
Tf2	BC 337-25	421 338 1	004				
Tf3	BC 327-25	421 328 8	004				
Tf4	AC 128	420 128 3	008	Mx1	M2a-94	940 017 5	034
Th2, Tr1-3, Tr5, 7, Ti2, Ty3, Tz3	BC 547 B	421 005 4	004	Mz1	MM-5	940 026 1	012
Ti1	TEA 1087	430 204 1	009	Mz2	Arco 249 181 064 00	340 031 5	032
Tr 6, 8, Ty2	BF 459	423 460 7	007		Kondensaattorit Kondensatorer		
Ty1	2 N 3055	424 003 1	012				
Tz1	TIP 41 A	424 004 8	009	Cd5	1,5nF 160V rad	221 629 4	003
Tz2	BU 406	424 105 4	012	Cf6, Cz10	270pF 400V AC	239 759 1	002
	Diodit Dioder			Cf9, Cn9, Cy8, 10	1000uF 25V aks	250 345 7	007
Df1-3, Dy3	1 N 4007 (1 N 4002)	410 407 4	003	Cf11, 12, Cz4	100uF 40V aks	250 434 6	004
Dh1, 2, Dr1, 2, Dy1, 4, 5, Dz1	1 N 4448 (1 N 4148)	410 449 0	002	Cx6, 7	2200uF 40V aks	250 448 7	009
Dx1	B 80 C5000	411 832 1	014	Cy16	470uF 25V aks	250 339 2	005
Dz2	ESM 181-400 R	410 223 4	009	Cz6	24nF 630V aks	221 835 7	005
Dz3-5	BA 159	410 159 6	004	Cz13	4,7nF 1000V	240 965 4	005
Dz6	TV 18 SLC	411 018 5	013				
	Vastukset Motstånd						
Rr10	3,9 kohm 5 W	140 964 8	005				
Ry2	2,7 kohm 1 W	140 159 8	003				
Ry8	1 ohm 1 W	140 077 1	003				
Ry30	12 kohm 2 W	140 277 9	003				
Rz10	220 ohm 2 W	140 233 9	003				
Rz11	5,6 ohm 1 W	140 095 3	003				
Rz17	4,7 ohm 1 W	140 093 9	003				
Rz							
Rh15, Ri8, 11	10 ohm 0,33 W	124 401 6	001				
Rh16	12 ohm 0,33 W	124 403 0	001				
Rz4	0,47 ohm 0,7 W	132 069 3	002				

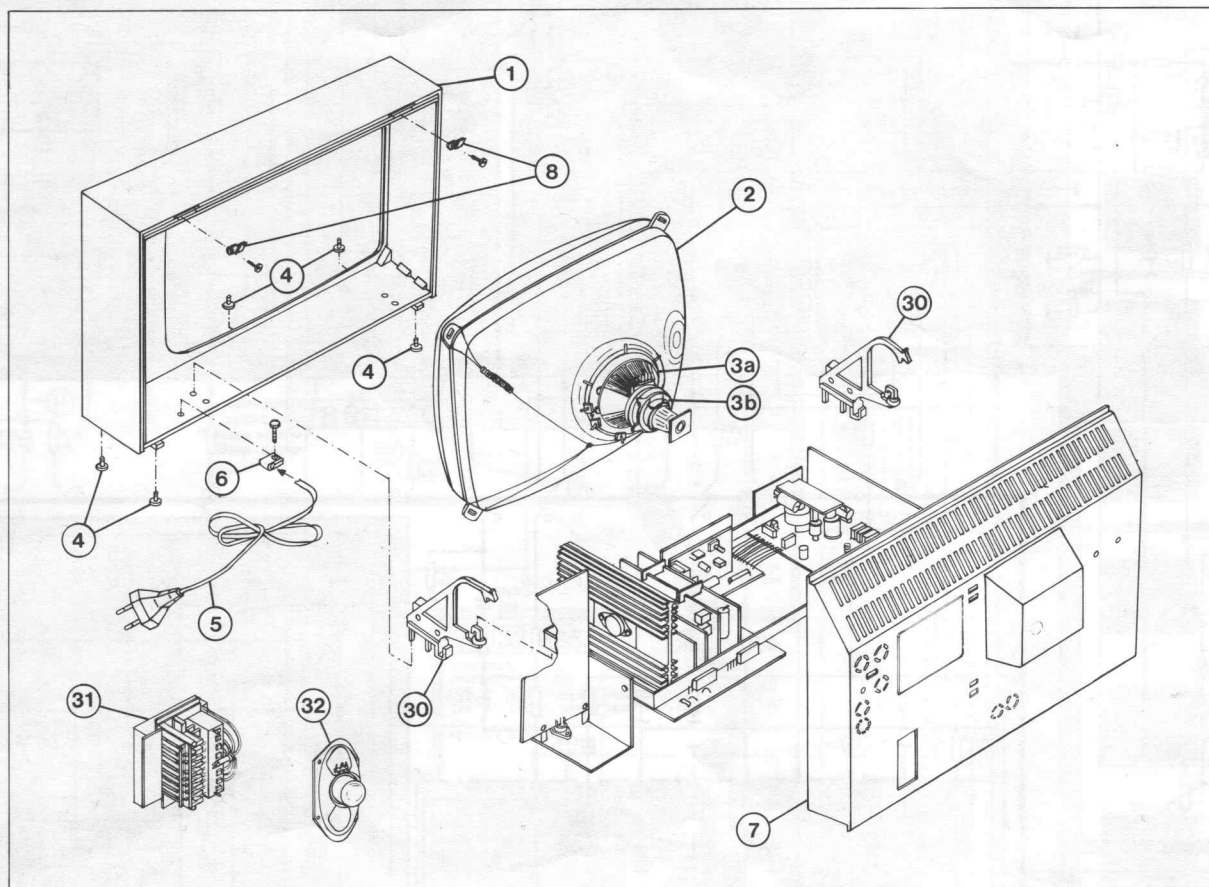

Viite Pos. nr. Part No Pos. Nr.	Osa/arvo Benämning Description Bezeichnung	Til. no Best. nr. Order No Best. Nr.	Hintar. Prisg. Price Gr. Preisgr.
	Mekaaniset osat Mekaniska delar		
1		783 039 0	043
2		460 124 7	043
3a		340 532 7	028
3b		540 437 1	001
4		875 050 3	001
5		700 380 4	010
6		781 015 2	001
7		781 001 1	022
8		840 186 9	002
30		781 020 0	005
31		520 122 0	037
32		330 208 0	023

8012

Oikeudet muutoksiin pidätetään.
Rätt till ändringar förbehålles.